

Effect of Multilayer Structure Parameters on Magneto-impedance Ratio with Low Frequency Measurements

Vina Oktaria, Candra Tirta Putra, Artono Dwijo Sutomo, Utari, Budi Purnama

Physics Department, Universitas Sebelas Maret, Jl. Ir. Sutami 36A, Kentingan, Jebres,
Surakarta, 57126, INDONESIA

bpurnama@mipa.uns.ac.id

Received XX Month Year, Revised XX Month Year, Published XX Month Year

Abstract: The magneto-impedance of the NiFe multilayer system is studied dependent on their multilayered structure. The multilayer structures of [NiFe/Cu] 4 and [NiFe/Cu]2 /Cu/[NiFe/Cu]2 on the meander structure PCB Cu substrate in this study were deposited using the electrodeposition method. The frequency was varied in order to determine its effect on the magneto-impedance ratio. The results of the magneto-impedance characterization measurement showed that the maximum MI ratio in the multilayer [NiFe/Cu]4 structure was 6.82% while in [NiFe/Cu]2/Cu/[NiFe/Cu]2 was 3.08% with a frequency of 100 kHz. The increase in the MI ratio in the low-frequency range indicates that the MI ratio depends on the structure of the layer which is affected by the permeability of the magnetic material.

Keyword: NiFe, Multilayer, magneto-impedance, low frequency

1. Introduction

Magneto-impedance (MI) is defined as a phenomenon of the changes in the impedance of ac currents in magnetic materials as a result of the influence of external magnetic fields [1]. The MI effect is very suitable for use in magnetic sensor applications since it has a high sensitivity, even up to the pico-Tesla order [2]. In previous studies, by using a multilayer meander-structure configuration, a large MI ratio that is highly sensitive to external magnetic fields is obtained at relatively low frequencies [3,4]. The spacer layer of non-magnetic (Cu, Ag) or semiconductor (Ta, MgO) materials are usually used in multilayered systems [5]. The presence of this non-magnetic or semiconductor layer produces an induced-biasing field between the magnetic layer so that the higher magnetoimpedance ratio realizes [5,6].

The soft magnetic material with high permeability is suitable for the magneto-impedance effect realization [7-10]. The alloy of NiFe such kind Permalloy is a reliable one because it has superior magnetic properties such as high permeability, small magnetostrictive coefficient, and low coercivity [11-13].

In recent years many studies have been conducted to modify MI ratios with various physical parameter deposition as well as different methods. Meanwhile, this paper reports the dependence of the MI ratio on the addition of a spacer layer Cu on a

multilayer [NiFe/Cu]. The low frequency of kHz order is used to evaluate the magnetoimpedance ratio at room temperature following the total impedance sample under various magnetic fields.

2. Experimental Methods

In this study, multilayered system NiFe and Cu are deposited on a meander-structure PCB Cu substrate. An electrodeposition procedure is performed for the whole experiment. Electrodeposition is performed using Pt electrodes. Electrolyte solution separately uses for both Cu and NiFe deposition. Firstly, the PCB Cu substrate was cleaned using an ultrasonic cleaner for 15 minutes following the electrodeposition process [4]. The electrolyte solution is used in the electrodeposition process for the NiFe layer consists of $\text{NiSO}_4 \cdot 6\text{H}_2\text{O}$ 0.099 M, $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ 0.012 M, H_3BO_3 0.149 M, $\text{C}_6\text{H}_8\text{O}_3$ 0.002 M. Whereas for the Cu layer, the electrolyte solution is used was $\text{CuSO}_4 \cdot 5\text{H}_2\text{O}$ 0.065 M and $\text{C}_6\text{H}_8\text{O}_3$ 0.002 M.

The deposition process for NiFe on PCB Cu substrate is carried out using a current density of 15.5 mA/cm^2 . The next step was to coat Cu with a current density of 8 mA/cm^2 . The electrodeposition process was repeated to obtain a multilayer layer (Fig. 1). Figure 1 (a) shows a multilayer illustration of $[\text{NiFe/Cu}]_N$ with repeated deposition processes up to $N = 4$, later namely sample A. Meanwhile, Figure 1(b) shows the multilayer $[\text{NiFe/Cu}]_4$ when the Cu spacer layer is inserted so that it changes to $[\text{NiFe/Cu}]_2/\text{Cu}/[\text{NiFe/Cu}]_2$ namely sample B. The electrodeposition process was carried out at room temperature.

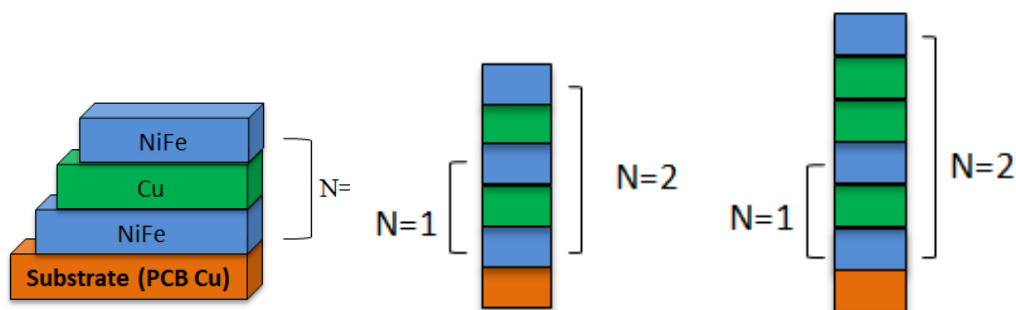


Figure 1. Schematic of multilayer structures (a) $[\text{NiFe/Cu}]_N$ and (b) $[\text{NiFe/Cu}]_N/\text{Cu}/[\text{NiFe/Cu}]_N$ on PCB Cu substrate

The obtained multilayer sample is then evaluated for its magneto-impedance characterization. Impedance measurements were carried out using the Instek GW LCR 819 meter to obtain the resistance (R), capacitance (C), and inductance (L) for individual change in the external magnetic field (H). The measured impedance value is the total impedance of the real component (R) and the imaginary component (X). Magneto-impedance measurements are carried out by flowing AC and varying the frequency range of 20-100 kHz. The magneto-impedance measurement scheme is shown in Figure 2. The change in impedance (Z) when given an external magnetic field

(H) known as the MI ratio is calculated using Equation 1. The process of measuring magneto-impedance is carried out at room temperature.

$$MI(\%) = \frac{\Delta Z}{Z} (\%) = \frac{Z(H) - Z(H_{max})}{Z(H_{max})} \times 100\% \quad (1)$$

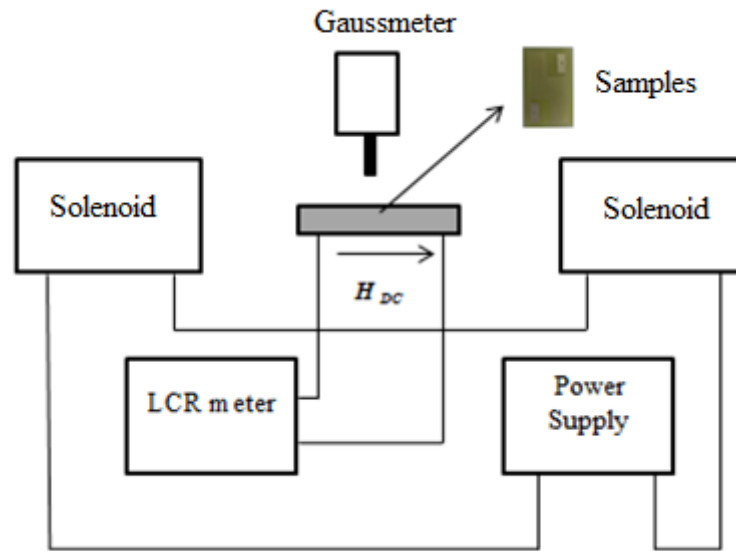


Figure 2. Schematic diagram of the magnetoimpedance measurement

3. Discussion

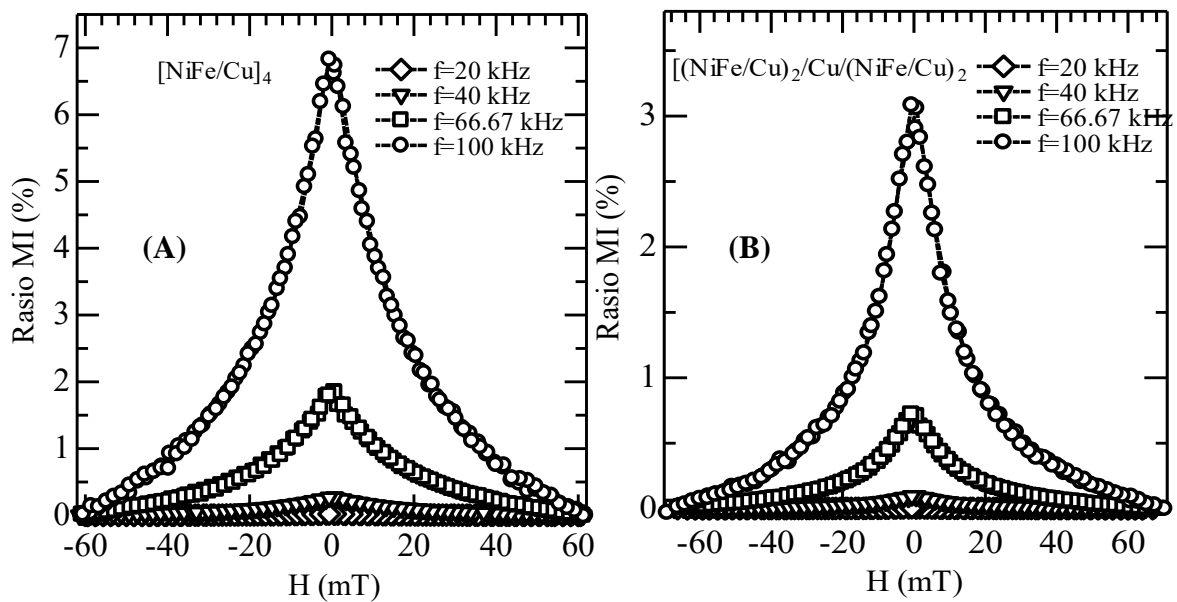


Figure 3. The magnetoimpedance of MI– H curve for sample A of multilayered $[\text{NiFe/Cu}]_4$ and sample B of multilayered $[(\text{NiFe/Cu})_2/\text{Cu}/(\text{NiFe/Cu})_2]$

Figures 3(a) and (b) show the curve of the MI ratio ($\Delta Z/Z$) as a function of the magnetic field, i.e. sample A of $[\text{NiFe/Cu}]_4$ and sample B of $[\text{NiFe/Cu}]_2/\text{Cu}/[\text{NiFe/Cu}]_2$ multilayered structure, respectively. The MI measurement is performed at room temperature for frequencies in the 20–100 kHz range. It can be seen that the typical MI curve is obtained. For the whole, the variation of the frequency measurement, sample A owing higher MI ratio compares to sample B. It is suggested that two multilayered systems of the $[\text{NiFe/Cu}]_2$ significantly hold back a bias field over to Cu spacer, which reflects a lower MI ratio.

In the case of sample A, at the lowest frequency (20 kHz), the MI ratio of 0.019% is obtained, then the MI ratio changes to 0.26%, 1.79%, and 6.82% for the frequency of 40 kHz, 66.67 kHz, 6.82% respectively. Sample B also shows a similar change in the MI ratio. The MI ratios are obtained 0.006%, 0.26%, 0.72%, and 3.08% for frequencies measurement of 20 kHz, 40 kHz, 66.67 kHz, and 100 kHz, respectively. The change in the amount of the MI ratio obtained when the frequency variation is carried out is due to the skin depth value. With an increase in frequency, the skin depth is getting smaller, and the magnitude of the MI ratio which being more dominant influenced by the permeability and thickness of the material [7]. In addition, an increase in frequency will affect the change in reactance. In the low frequency magnetoimpedance effect measurement, increasing the reactance magnitude will increase of the MI ratio [14]. This is consistent with the results of previous studies regarding the relationship between MI ratio and frequency [15, 16].

The comparison between the sample A and B can be seen in Figure 4. The results show that the multilayer structure sample A produces a higher MI ratio compared to the structure multilayer sample B as depicted in Fig. 4 (a) i.e. MI ratio sample A of 6.82% and sample B of 3.08%. Other expressions of the comparison MI ratio as shown in Fig 4(b). This is explained as follows. When the Cu layer is inserted into the multilayer $[\text{NiFe/Cu}]_4$ structure so that it changes to $[\text{NiFe/Cu}]_2/\text{Cu}/[\text{NiFe/Cu}]_2$, the value of the MI ratio will decrease. The bias field between individual multilayered system become smaller because it is blocked by Cu spacer layer. It is expected the permeability becomes smaller and realize as a smaller magnetoimpedance ratio. Other, the difference in resistance between magnetic and non-magnetic layers also another factor [5]. When Cu is inserted, the non-magnetic layer (Cu) is thicker. Increasing the thickness of the Cu layer will reduce the resistance of the magnetic layer and the inductance which then decreases. In a multilayer structure, the decrease in inductance will affect the decrease of the MI ratio [14].

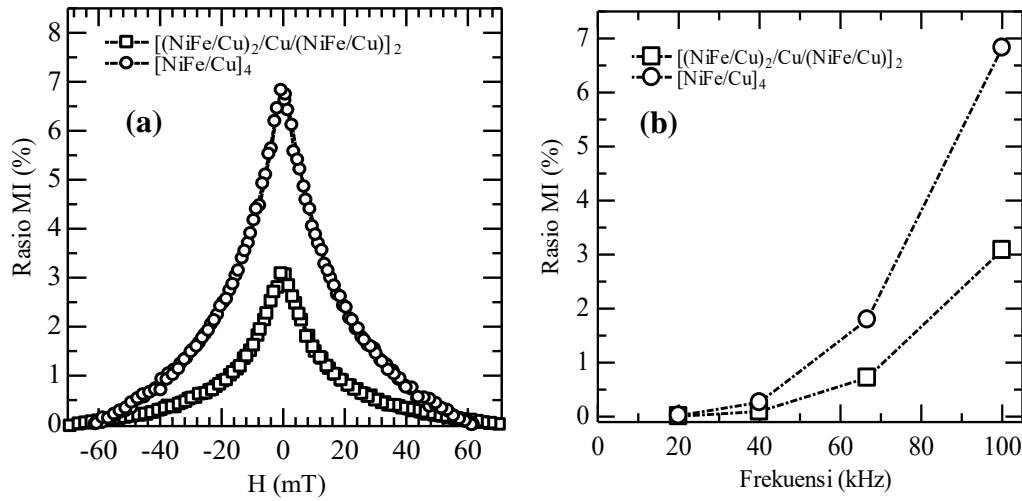


Figure 4. The comparison of the MI ratio in the sample A of the multilayer structure $[\text{NiFe/Cu}]_4$ and the sample B of $[(\text{NiFe/Cu})_2/\text{Cu}/(\text{NiFe/Cu})_2]$ (a) with a frequency measurement of 100 kHz. (b) The MI ratio versus frequencies of 20, 40, 66.67, 100 kHz

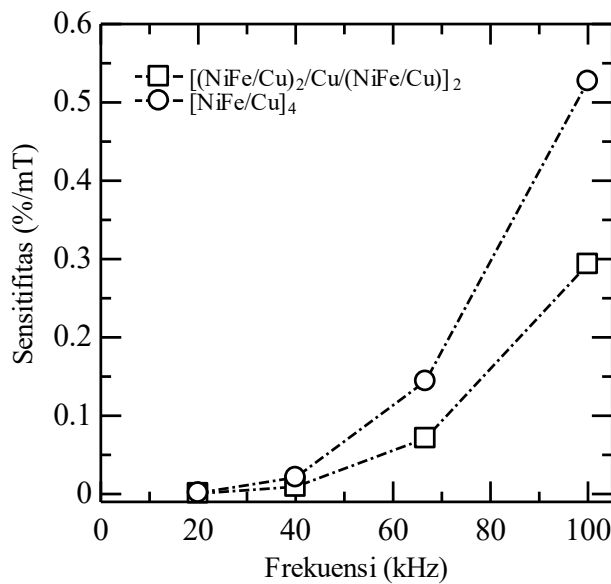


Figure 5. Comparison of the sensitivity to frequency measurements in the sample A of the multilayer $[\text{NiFe/Cu}]_4$ and the sample B of the $[(\text{NiFe/Cu})_2/\text{Cu}/(\text{NiFe/Cu})_2]$.

The sensitivity of the MI sensor calculates by the equation $\eta = \frac{2(\Delta Z/Z)_{max}}{\Delta H}$ where ΔH is the full width at half the maximum height of the MI ratio curve is depicted at Fig 5 for both sample A of the multilayered $[\text{NiFe/Cu}]_4$ and the sample B of the multilayered $[(\text{NiFe/Cu})_2/\text{Cu}/(\text{NiFe/Cu})_2]$. The sensitivity value increases with increasing frequency values consistent to the MI ratio. The highest sensitivity of 0.5271%/mT is obtained for sample A for frequency measurement of 100 kHz. From Figure 5, it can be

seen that the sensitivity of the magneto-impedance sensor increases as the magneto-impedance ratio value [17].

4. Conclusions

Magneto-impedance characterization of NiFe thin films with multilayer structures of [NiFe/Cu]₄ and [NiFe/Cu]₂/Cu/[NiFe]₂ resulted from electrodeposition. The layer structure greatly affects the increase in the MI ratio. The maximum MI ratio was obtained for the [NiFe/Cu]₄ structure. This indicates that the induce bias field between layer system plays an important role in the magneto impedance MI ratio. The magneto-impedance sensitivity magnitude is increase consistent with an increase in the magneto-impedance ratio.

Acknowledgements

This research was funded by DIPA Universitas Sebelas Maret of The Republic of Indonesia (Penelitian Unggulan Universitas Sebelas Maret Contract No. 452/UN27.21/PN/2020).

References

- [1] L. V. Panina and K. Mohri, "Magneto-impedance effect in amorphous wires," *Applied Physics Letters*, vol. 65, no. 9, pp. 1189–1191, Aug. 1994.
- [2] P. Delooze, D. J. Mapps, and L. V. Panina, "AC biased sub nano tesla magnetic field sensor for low frequency applications utilising magneto impedance in multilayer films," *INTERMAG Asia 2005. Digests of the IEEE International Magnetism Conference, 2005.*, 2005.
- [3] Ismail, Nuryani, and B. Purnama, "Influence of sample length to magneto-impedance effect in electrodeposited [Cu/Ni80Fe20]₃ multilayer wires at low frequency," 2016.
- [4] W. E. Prastyo, F. Maulana, N. Nuryani, and B. Purnama, "Magneto-impedance in Multilayered [Ni80Fe20/Cu]₄ with modification of the line-length pattern on Cu printed circuit board," *Journal of Physics: Conference Series*, vol. 909, p. 012030, Nov. 2017.
- [5] L. . Panina and K. Mohri, "Magneto-impedance in multilayer films," *Sensors and Actuators A: Physical*, vol. 81, no. 1–3, pp. 71–77, Apr. 2000.
- [6] Z. Zhou, Y. Zhou, and Y. Cao, "The investigation of giant magnetoimpedance effect in meander NiFe/Cu/NiFe film," *Journal of Magnetism and Magnetic Materials*, vol. 320, no. 20, pp. e967–e970, Oct. 2008.
- [7] M.-H. Phan and H.-X. Peng, "Giant magnetoimpedance materials: Fundamentals and applications," *Progress in Materials Science*, vol. 53, no. 2, pp. 323–420, Feb. 2008

- [8] A. García-Arribas, E. Fernández, A. Svalov, G. V. Kurlyandskaya, and J. M. Barandiaran, “Thin-film magneto-impedance structures with very large sensitivity,” *Journal of Magnetism and Magnetic Materials*, vol. 400, pp. 321–326, Feb. 2016.
- [9] H. Kikuchi, T. Umezaki, T. Shima, C. Sumida, and S. Oe, “Impedance Change Ratio and Sensitivity of Micromachined Single-Layer Thin Film Magneto-Impedance Sensor,” *IEEE Magnetics Letters*, vol. 10, pp. 1–5, 2019.
- [10] A. Sayad, E. Skafidas, and P. Kwan, “Magneto-Impedance Biosensor Sensitivity: Effect and Enhancement,” *Sensors*, vol. 20, no. 18, p. 5213, Sep. 2020.
- [11] A. C. Mishra and A. K. Jha, “Variation of magnetoimpedance of electrodeposited NiFe/Cu with deposition current density,” *Indian Journal of Physics*, vol. 91, no. 12, pp. 1535–1540, Jun. 2017.
- [12] A. A. Chlenova, A. A. Moiseev, M. S. Derevyanko, A. V. Semirov, V. N. Lepalovsky, and G. V. Kurlyandskaya, “Permalloy-Based Thin Film Structures: Magnetic Properties and the Giant Magnetoimpedance Effect in the Temperature Range Important for Biomedical Applications,” *Sensors*, vol. 17, no. 8, p. 1900, Aug. 2017.
- [13] S. Vasam and V. Srinivas, “Microstructure and magnetoimpedance studies of NiFe films electrodeposited on ITO substrate: Experiments and simulations,” *Journal of Magnetism and Magnetic Materials*, vol. 514, p. 167154, Nov. 2020.
- [14] Z. Feng, S. Zhi, X. Sun, L. Yan, C. Liu, and C. Lei, “Investigation the influence of structure parameters on giant-magnetoimpedance effect measured by non-contact method,” *Sensor Review*, vol. 40, no. 6, pp. 647–656, Oct. 2020.
- [15] S. Vasam and V. Srinivas, “Microstructure and magnetoimpedance studies of NiFe films electrodeposited on ITO substrate: Experiments and simulations,” *Journal of Magnetism and Magnetic Materials*, vol. 514, p. 167154, Nov. 2020.
- [16] A. Zhukov, M. Ipatov, P. Corte-León, L. G.- Legarreta, M. Churyukanova, J. M. Blanco, J. Gonzalez, S. Taskaev, B. Hernando, and V. Zhukova, “Giant magnetoimpedance in rapidly quenched materials,” *Journal of Alloys and Compounds*, vol. 814, p. 152225, Jan. 2020.
- [17] M. Knobel, M. Vázquez, and L. Kraus, “Giant Magnetoimpedance,” *Handbook of Magnetic Materials*, pp. 497–563, 2003.