

# Analytical Hierarchy Process (AHP), Fuzzy AHP, and TOPSIS for Determining Bridge Maintenance Priority Scale in Banjarsari, Surakarta

Ayu Intan Nurani<sup>1</sup>, Astri Tamara Pramudyaningrum<sup>2</sup>, Shofie Rizqi Fadhila<sup>3</sup>,  
Senot Sangadji<sup>4</sup>, Widi Hartono<sup>5</sup>

Civil Engineering Program Sebelas Maret University,  
Jl. Ir. Sutami 36A Kentingan Jebres Surakarta 57126, INDONESIA

[ayuintannurani@gmail.com](mailto:ayuintannurani@gmail.com)

**Abstract.** Data on 2015 [9] show that less than 50 percent of provincial and local level bridges in Central Java are in good condition. In the other hand, it has been reported that local bridges in the city of Surakarta have been deteriorated and damaged. The maintenance and rehabilitation action often done based solely on incidental reports without systematic planning. Analytical Hierarchy Process, Fuzzy Analytical Hierarchy Process, and Technique for Order Preference by Similarity to Ideal Solution (TOPSIS) were used to compare the priority scale of bridge management in Kecamatan (District) Banjarsari, Surakarta. Bridge Management System 1993 (BMS 1993) standard was used to quantify bridge damage condition by means of direct visual observation. Scores used in this 3 different analysis were determined by comparing aforementioned 2 criteria and 9 sub criteria. Accordingly, criteria and subcriteria defined in this paper were based on the standard. The criteria employed were bridge damage condition and average daily traffic (ADT). Bridge condition criteria were then divided further into sub criteria; i.e. river stream, safety support building, foundation, pier, girder system, parapet, floor system, expansion joint, and other property. From 11 bridges considered in this study, Maris Bridge has the highest priority determined in 3 different methods. AHP and TOPSIS methods show Ringin Semar Bridge the lowest priority to maintain. On the other hand, Fuzzy AHP determines Balapan Bridge as the lowest order. *Keyword: Bridge Management, BMS 1993, AHP, FAHP, TOPSIS.*

## 1. Introduction

Bridge examination and maintenance is a process of Bridge Management System which includes routine maintenance intervals to give a better monitoring system and control maintenance. Data on 2015 [9] show that less than 50 percent of provincial and local level bridges in Central Java are in good condition. In the other hand, it has been reported that local bridges in the city of Surakarta have been deteriorated and damaged. Yet, there is no effective and efficient maintenance program handling the problem.

The condition limit of the bridge can be exceeded early due to damage of main elements. Unplanned and insidental maintenance has the potential to disrupt the flow of traffic and significantly increase the cost of road users. By studying the method of bridge management for the assessment of the condition of the bridge it is expected to assist in developing a good bridge management system. [13]. The maintenance and rehabilitation action in Surakarta often done based solely on incidental reports without

systematic planning. Further, data inaccuracies make the bridge maintenance at local level even ineffective without appropriate resources allocation. The government of the city of Surakarta was fully aware of the problem and needs decision making support system for systematic and rational maintenance and rehabilitation program of local bridges. Maintenance done be gave a hope that all the in Indonesia will be effective and the purpose of an examination this Bridge was to convince that bridges are working safely and the need for held a certain action to the maintenance and repair of periodically of maintenance in bridge any very important to therefore condition bridge is staying on its function [5].

This study investigates condition assessment on 11 bridges in Banjarsari, owned by Surakarta City Government as starting point to set priority for their efficient maintenance. Condition assessment was performed by means of the Bridge Management System (BMS) standard while priority analysis utilized the Analytical Hierarchy Process (AHP) method, fuzzy logic (Fuzzy AHP), and TOPSIS.

Bridge Management System 1993 (BMS 1993) standard was used to quantify bridge damage condition by means of direct visual observation. Accordingly, criteria and subcriteria defined in this paper were based on the standard. In this study, only comparisons of priority scale compilations between AHP, Fuzzy AHP, and TOPSIS were then compared

## 2. Methodology

### 2.1. Research Object

There are 11 bridges chosen in Banjarsari, Surakarta for analysis. These bridges were recapitulated in table 1.

**Table 1.** Bridges List

No.	Street	Bridge Name
1	Jl. Walanda Maramis	Maris
2	Jl. Adi Sumarmo	Komplang
3	Jl. Letjen S. Parman	Pasar Legi
4	Jl. Monginsidi	Ringin Semar
5	Jl. Sutan Syahrir	Ngebrusan
6	Jl. Letjen Sutoyo	Ngemplak
7	Jl. Kusumoyudan	Setabelan
8	Jl. D.I. Panjaitan	Rejosari
9	Jl. Dr. Setia Budi	Munggun
10	Jl. Gajah Mada	Balapan
11	Jl. Letjen Sutoyo	Nayu Ngemplak

### 2.2. Data Collection

Primary data is data obtained from direct observation from the field. In this study, primary data consists of two types: primary data for analysis with BMS method and data for analysis of AHP and FAHP methods. Primary data for BMS analysis were obtained from the assessment of the condition of bridge elements and components visually in the study sites. Assessment refers to the bridge inspection form based on BMS standards.

For analysis, AHP and FAHP method required data from purposive questionnaires given to respondents. Target respondents are stakeholders who have work experience in the field of bridge maintenance. The respondents were ten officers and engineers from the Department of Public Works Surakarta and the Technical Executing Agency of Bina Marga Surakarta. Scores given by respondents are recapitulated on table 2.

Secondary data is supporting data obtained from an intermediate medium or reference. These data were obtained from Public Works Department of Central Java Province, namely road map and daily traffic data report. Saaty (2008) assigns a quantitative scale of 1 (one) to 9 (nine) to assess the comparative importance of an element to another.

**Tabl 2.** Scale of Relatives Importances [12]

Importance Scale	Definition
1	Equal importance
3	Weak importance of one over another
5	Essential or strong importance
7	Demonstrated importance
9	Absolute importance
2,4,6,8	Intermediate values between two adjacent judgments
Reciprocals	If activity i has one of the above nonzero numbers assigned to it when compared with activity j, then j has the reciprocal value when compared with i.

### 2.3. Hierarchy Structure

Criteria and subcriteria defined in this paper were based on BMS 1993 standard. The criteria employed were bridge damage condition (A) and average daily traffic (ADT) (B). Bridge condition criteria were then divided further into sub criteria; i.e. river stream (A1), safety support building (A2), foundation (A3), pier (A4), girder system (A5), parapet (A6), floor system (A7), expansion joint (A8), and other property (A9). The hierarchy structure consists of criteria and subcriteria of this problem is shown in Figure 1.

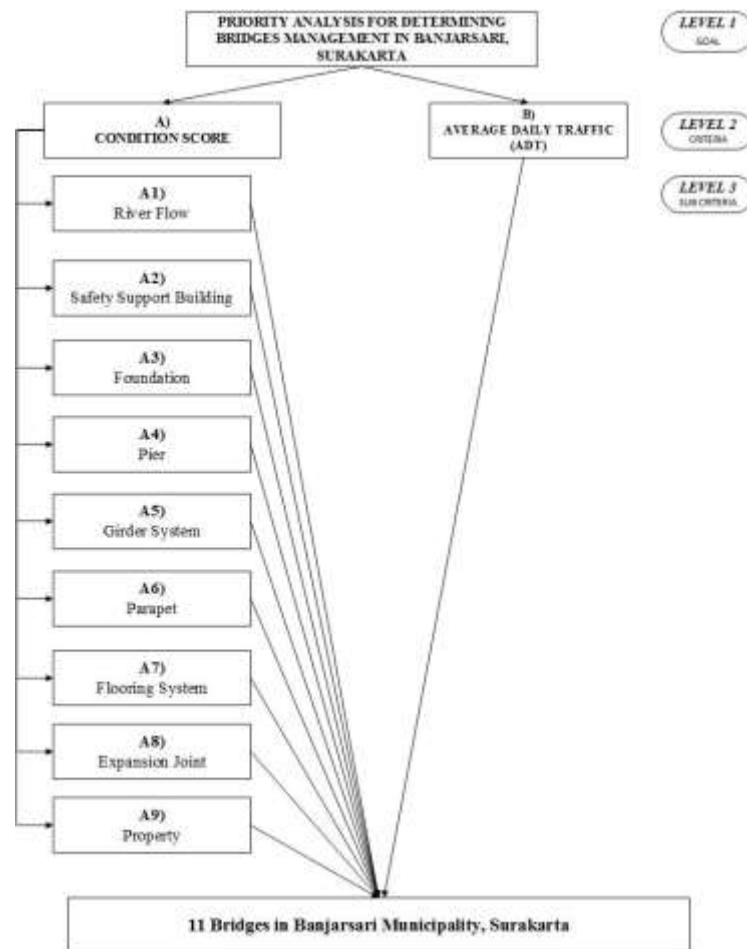


Figure 1. Hierarchical Structure of The Problem

#### 2.4. Analytical Hierarchy Process (AHP)

AHP is a model developed by Thomas L. Saaty. Supporting model decision that disassemble problems multi-factors or multi the criteria a complex into a hierarchy [9]. Analytical Hierarchy Process had the capability for solving a problem that multiply the criteria based on a comparison preference of an element in the hierarchy [5]. Comparisons scores that were given by respondents should be constructed as a set of pairwise comparison matrix. Comparison matrix from both criteria and subcriteria were analyzed to determine priority weight of each element. Consistency ratio should be checked for every elements in each bridges. Analytical Hierarchy Process according to Saaty are explained as follows.

2.4.1. Matrix pairwise comparison. Comparison value of element  $A_1$  to  $A_2$  is  $a_{12}$ . It is determined by:

- a) If  $a_{nm} = \alpha$ , then  $a_{nm} = 1/\alpha$ ,  $\alpha \neq 0$
- b) If " $A_n$ " seem to have the same level of importance with  $A_m$ , then  $a_{nm} = a_{mn} = 1$ .  
 The value of "a" was given by respondents. Since there are more than 1 respondent then geometric mean was used to normalize opinions. Geometric mean (GM) can be determined by equation (1)

(1)

GM = Geo Mean, n = number of respondents,  $x_n$  = scoring by respondent n.

2.4.2. *Determining eigenvector.* Eigenvector was used to make a priority rank between elements in comparison matrices. Eigenvector was obtained by doing these steps:

- a) Squaring the matrix until there is no difference in eigenvector value between source matrix and the squared matrix.
- b) Sum up values in a row of the squared matrix to get PV.

$$PV = a_{11} + a_{12} + \dots + a_{1n} \quad (2)$$

PV = sum of row,  $a_{ij}$  = matrix value row i, column j.

- c) The eigenvector is determined by equation (3).

$$Wp = \frac{PV}{\sum PV} \quad (3)$$

Wp = eigenvector, PV = sum of row,  $\sum PV$  = sum of PV in a column.

2.4.3. *Determining eigen maximum ( $\lambda_{max}$ ).* Eigen maximum is determined by multiply comparison matrix with eigenvector earned before.

$$\lambda_{maks} = \sum a_{ij} \times Wp \quad (4)$$

$\lambda_{max}$  = eigen maximum,  $a_{ij}$  = matrix value row i, column j.,  $W_p$  = eigenvector

2.4.4. *Validation.* Validation is needed for knowing the consistency of opinions given by respondents. The consistency will be affect to the result. Validation is determined by the consistency ratio (CR). If  $CR > 10\%$ , then judgment value should be fixed. These following points is the procedure to get consistency ratio.

- a) Determine consistency index (CI).

$$CI = \frac{\lambda_{maks} - n}{n - 1} \quad (5)$$

CI = Consistency Index,  $\lambda_{max}$  = eigen maximum, n = order of matrix.

- b) Determine the random index (RI) according to order of the matrix. Random indexes were listed as follow:

**Tabel 3.** Random index (Saaty 1998, in Nurdin 2016)

<i>n</i>	1	2	3	4	5	6	7	8	9	10
<i>RI</i>	0	0	0,58	0,9	1,12	1,24	1,32	1,41	1,45	1,49

- c) Determine the consistency ratio with equation (6).

$$CR = \frac{CI}{RI} \quad (6)$$

CR = Consistency Ratio, CI = Consistency Index, RI = Random Index.

## 2.5. FAHP

Fuzzy AHP is the combination of AHP method using fuzzy concept approach. To determine the value of fuzzy AHP, it used Triangular Fuzzy Number (TFN). Triangular Fuzzy Number (TFN) is fuzzy association theory related with subjective human assessment using linguistics. Bridge priority maintenance determination in Surakarta

was conducted by calculating the condition number of each bridge based on the selected criteria.

2.5.1. *Scale assessment conversion.* Change the weight from AHP scale to fuzzy number using TFN as shown in the table I. TFN was indicated by value l, m, u which describe smallest possibility, that promising the biggest possibility.

**Table 4.** Scale Assessment Conversion Fuzzy AHP

Linguistic Scale For Importance	Fuzzy Numbers	Triangular Fuzzy Number (TFN)	Reciprocal
<i>Just Equal</i>	1	(1, 1, 3)	(1/3, 1, 1)
<i>Moderately important</i>	3	(1, 3, 5)	(1/5, 1/3, 1)
<i>Strongly Important</i>	5	(3, 5, 7)	(1/7, 1/5, 1/3)
<i>Very strong</i>	7	(5, 7, 9)	(1/9, 1/7, 1/5)
<i>Extremely strong</i>	9	(7, 9, 9)	(1/9, 1/9, 1/7)

2.5.2. *Determine Fuzzy Synthetic Extent (Si) number*

$$S_i = \sum_{j=1}^m M_{gi}^j \times \left[ \sum_{i=1}^n \sum_{j=1}^m M_{gi}^j \right]^{-1} \quad (7)$$

$S_i$  = fuzzy synthetic number,  $\sum_{(j=1)}^m M_{gi}^j$  = total number of cells in the column that started from column 1 in every matrix row,  $j$  = column,  $i$  = row,  $M$  = Triangular Fuzzy Number (TFN),  $m$  = total of the criteria,  $g$  = parameter (l, m, u)

2.5.3. *Calculating Degree of Possibility (V)*

$$V(M_1 \geq M_2) = \begin{cases} 1; & \text{jika } m_1 \geq m_2 \\ 0; & \text{jika } l_2 \geq u_1 \\ \frac{l_1 - u_2}{(m_2 - u_2) - (m_1 - l_1)} & \text{sebaliknya} \end{cases} \quad (8)$$

2.5.4. *Comparing the degree of possibility between the criteria.* This step was done by taking the smallest number in degree of possibility in each criteria.

$$W' = (d'(A), d'(B), \dots, d'(A_n))T \quad (9)$$

2.5.5. *Vector weight normalization.* Vector weight normalization was done using equation as follows:

$$CRISP\ d(A_n) = \frac{d'(A_n)}{\sum_i^n d'(A_n)} \quad (10)$$

$d'$  = value of crisp for  $A_n$  criteria,  $d'(A_n)$  = the minimum value from degree of possibility for a criteria

## 2.6. *Technique for Order Preference by Similarity to Ideal Solution (TOPSIS)*

TOPSIS is one of multicriteria troubleshooting method that giving the solution of alternatives by comparing the best alternatives and the worst alternatives[8]. Steps of TOPSIS:

2.6.1. Create a decision matrix.

$$X = \begin{matrix} a_1 \\ a_2 \\ a_3 \\ \vdots \\ a_m \end{matrix} \begin{bmatrix} x_1 & x_2 & x_3 & \dots & x_n \\ x_{11} & x_{12} & x_{13} & \dots & x_{1n} \\ x_{21} & x_{22} & x_{23} & \dots & x_{2n} \\ x_{31} & x_{32} & x_{33} & \dots & x_{3n} \\ \vdots & \vdots & \vdots & & \vdots \\ x_{m1} & x_{m2} & x_{m3} & \dots & x_{mn} \end{bmatrix}$$

2.6.2. Create a normalized decision matrix

$$r_{ij} = \frac{x_{ij}}{\sqrt{\sum_{i=1}^m x_{ij}^2}} \tag{11}$$

2.6.3. Determine positive ideal solution matrix and negative ideal solution matrix. Positive ideal solution matrix is the maximum value for each criterion from all alternatives, on the other hand negative ideal solution is the minimum value for each criterion from all alternatives.

2.6.4. Calculate separation measure. Separation measure is a measurement of distance from an alternative by using a positive ideal solution and negative ideal solution.

$$D_i^+ = \sqrt{\sum_{j=1}^n (Y_{ij} - Y_j^+)^2} \tag{12}$$

$$D_i^- = \sqrt{\sum_{j=1}^n (Y_{ij} - Y_j^-)^2} \tag{13}$$

2.6.5. Calculate the preference value for each alternatives

$$V_i^+ = \frac{D_i^-}{(D_i^+ + D_i^-)}, 0 \leq V_i^+ \leq 1 \tag{14}$$

2.6.6. Rank the alternatives. The alternatives be sorted from the greatest V to the samllest V.

### 3. Results and Discussion

The number of respondents who gave the assessment was ten people, so the weight of group assessment is stated by looking for the geometric mean value (Geometric Mean) of the assessment given by all respondents. This geometric mean value is then compiled into a comparison matrix and a weighted analysis is performed between criteria.

**Tabel 5.** Matrix Comparison (Criteria)

	<b>Bridge Condition</b>	<b>Average Daily Traffic (ADT)</b>
<b>Bridge Condition</b>	1	4,9294
<b>Average Daily Traffic (ADT)</b>	0,2029	1

**Tabel 6.** Matriks Comparison (Subcriteria)

	<b>A1</b>	<b>A2</b>	<b>A3</b>	<b>A4</b>	<b>A5</b>	<b>A6</b>	<b>A7</b>	<b>A8</b>	<b>A9</b>
<b>A1</b>	1,0000	0,7762	0,3066	0,8960	0,3786	0,7947	0,5966	0,5870	0,9368
<b>A2</b>	1,2884	1,0000	0,1418	0,2389	0,3060	0,3309	0,3205	0,4275	2,3618
<b>A3</b>	3,2612	7,0511	1,0000	3,6224	4,7220	2,8587	4,8264	3,0963	5,4929
<b>A4</b>	1,1161	4,1864	0,2761	1,0000	2,1594	2,1823	1,7335	1,8616	2,7855

	A1	A2	A3	A4	A5	A6	A7	A8	A9
A5	2,6415	3,2679	0,2118	0,4631	1,0000	4,3970	2,9113	2,8276	4,4218
A6	1,2584	3,0219	0,3498	0,4582	0,2274	1,0000	0,3007	0,5899	3,5641
A7	1,6761	3,1203	0,2072	0,5769	0,3435	3,3254	1,0000	3,3866	4,1964
A8	1,7035	2,3389	0,3230	0,5372	0,3537	1,6952	0,2953	1,0000	4,8401
A9	1,0674	0,4234	0,1821	0,3590	0,2262	0,2806	0,2383	0,2066	1,0000

### 3.1. AHP Result

The comparison criterion matrix is order 2, therefore there is no need for consistency test. While the result of consistency matrix test of comparative subcriteria evaluation showed that the data is consistent because the consistency ratio equal to 0,0876 so that fulfill the criterion of consistency ratio  $<0,1$ . The result of consistency test of subcriteria assessment is shown in table 7. The result of recapitulation of criterion weight and subcriteria with AHP method is described in table 8. The result of weighting is then multiplied by the quantity value of each criterion and subcriterion element on each bridge.

**Tabel 7.** Data Validation (Subcriteria)

Consistency Test		
n = 9	RI = 1,45	CI = 0,127
CR = 0,0876		
CR < 0,1 → Valid		

**Tabel 8.** Criteria and Subcriteria Weight (AHP)

Criteria	Weight	Sub criteria	Weight
A Bridge Condition	0,8313	A1 River flow	0,0564
		A2 Safety Support Building	0,0405
		A3 Fondation	0,3178
		A4 Pier	0,1371
		A5 Girder System	0,1556
		A6 Parapet	0,0661
		A7 Floor System	0,1154
		A8 Expansion Joint	0,0798
		A9 Other Property	0,0313
B Average Daily Traffic (ADT)	0,1687		

### 3.2. FAHP Result

Based on data from respondents about the comparison of the bridge's elements, the conversion results from AHP scale to fuzzy number using TFN as shown in table 9 and 10.

**Table 9.** The conversion results of criteria

CRITERIA	A			B		
	L	M	U	L	M	U
A	1	1	1	3,5068	4,9294	6,3124
B	0,1584	0,2029	0,2852	1	1	1



**Table 10.** The conversion results of sub criteria

SUBCRITERIA		A1	A2	A3	A4	A5	A6	A7	A8	A9
A1	L	1	0,6557	1,6870	0,5133	1,3865	0,6801	0,8891	0,9349	0,6594
	M	1	1,2884	2,8391	1,1161	2,6415	1,0955	1,6761	1,7035	0,9292
	U	1	1,8549	4,4288	1,3211	3,9363	2,0377	2,2144	2,6011	1,6896
A2	L	0,5391	1	4,7858	2,4278	1,5804	1,5072	1,5188	1,2173	0,2826
	M	0,7762	1	7,0511	4,1864	3,2679	3,0219	2,7163	2,3389	0,4234
	U	1,5250	1	8,2756	4,5471	4,0365	3,4461	4,2255	2,9818	0,6815
A3	L	0,2258	0,1208	1	0,1701	0,1497	0,1997	0,1472	0,1933	0,1374
	M	0,3522	0,1418	1	0,2761	0,2118	0,3498	0,2072	0,3230	0,1821
	U	0,5928	0,2090	1	0,5253	0,3224	0,6608	0,3936	0,7192	0,2763
A4	L	0,7569	0,2199	1,9037	1	0,2580	0,2866	0,2814	0,2724	0,2182
	M	0,8960	0,2389	3,6224	1	0,4631	0,4582	0,5769	0,5372	0,3590
	U	1,9481	0,4119	5,8776	1	0,6960	0,7591	0,7068	0,8027	0,5304
A5	L	0,2540	0,2477	3,1013	1,4368	1	0,1504	0,2036	0,2064	0,1563
	M	0,3786	0,3060	4,7220	2,1594	1	0,2274	0,3435	0,3537	0,2262
	U	0,7213	0,6327	6,6779	3,8761	1	0,3778	0,5404	0,6123	0,4653
A6	L	0,4907	0,2902	1,5133	1,3174	2,6468	1	1,7625	0,9117	0,1965
	M	0,9129	0,3309	2,8587	2,1823	4,3970	1	3,3254	1,4758	0,2806
	U	1,4704	0,6635	5,0080	3,4898	6,6486	1	4,9076	2,4875	0,4670
A7	L	0,4516	0,2367	2,5405	1,4148	1,8503	0,2038	1	0,1775	0,1598
	M	0,5966	0,3681	4,8264	1,7335	2,9113	0,3007	1	0,2953	0,2383
	U	1,1247	0,6584	6,7954	3,5540	4,9113	0,5674	1	0,4789	0,4921
A8	L	0,3845	0,3354	1,3904	1,2457	1,6332	0,4020	2,0880	1	0,1461
	M	0,5870	0,4275	3,0963	1,8616	2,8276	0,6776	3,3866	1	0,2066
	U	1,0696	0,8215	5,1729	3,6710	4,8440	1,0968	5,6327	1	0,3643
A9	L	0,6594	1,4674	3,6195	1,8852	2,1489	2,1411	2,0320	2,7451	1
	M	0,9292	2,3618	5,4929	2,7855	4,4218	3,5641	4,1964	4,8401	1
	U	1,6896	3,5380	7,2774	4,5826	6,3974	5,0898	6,2562	6,8427	1

The result data of criteria and subcriteria based on FAHP method as shown in table 11 and 12.

**Table 11.** Criteria and subcriteria weight (FAHP)

Criteria	Weight	Subcriteria	Weight
A Bridge Condition	1	A1 River flow	0,0279
		A2 Safety Support Building	0,0110
		A3 Fondation	0,2646
		A4 Pier	0,1603
		A5 Girder System	0,1952
		A6 Parapet	0,0743

Criteria	Weight	Subcriteria	Weight	
		A7	Floor System	0,1596
		A8	Expansion Joint	0,1071
		A9	Other Property	0,0000
B	Average Daily Traffic (ADT)	0		

### 3.3. TOPSIS Result

Pair comparison matrix is obtained from the result of the questionnaire given to the stakeholder for resulting the criteria-weight dan subcriteria-weight. With TOPSIS method, pair comparison matrix is analyzed for the consistency and the result is 0,0885.

**Table 12.** Criteria and subcriteria weight (TOPSIS)

Criteria	Weight	Subcriteria	Weight	
A	0,8313	A1	River flow	0,0479
		A2	Safety Support Building	0,0360
		A3	Fondation	0,2524
		A4	Pier	0,1086
		A5	Girder System	0,1281
		A6	Parapet	0,0597
		A7	Floor System	0,0992
		A8	Expansion Joint	0,0717
		A9	Other Property	0,0278
B	Average Daily Traffic (ADT)	0,1687		

Decision matrix in TOPSIS is obtained by inserting the bridge damage condition and average daily traffic. And than be calculated the distance between alternatives and positive ideal solution and negative ideal solution. Priority of bridge maintenance is obtained from the order of preference value between the positive ideal solution and negative ideal solution.

### 4. Conclusion

From 11 bridges considered in this study, Maris Bridge has the highest priority determined in 3 different methods. AHP and TOPSIS methods show Ringin Semar Bridge is the lowest priority to maintain. On the other hand, Fuzzy AHP was determined Balapan Bridge as the lowest order. The comparison of priority scale from the methods is shown in table 13.

The weight differences is due to the conversion of AHP rating into FAHP and the difference in the calculation with topsis. Conversion ratings on FAHP can make a criterion element have the same weight as zero so it will make a significant difference.

Seen in table 11, the weights for the ADT criterion and the complement are zero in FAHP method. This certainly gives a big influence compared to AHP which still gives weight to each element of the review.

Differences are also seen in the priority ranking weighting of each bridge. Differences in the normalization of alternative quantification make the weight of each bridge on the method less than 1, whereas in the FAHP and TOPSIS methods almost all elements have more weight than 1.

**Table 13.** Result Comparison

Priority Number	AHP Method		FAHP Method		TOPSIS Method	
	Name of Bridge	Weight	Name of Bridge	Weight	Name of Bridge	Weight
1	Maris	0,2000	Maris	3,7249	Maris	0,7108
2	Ngemplak	0,1384	Munggung	2,8291	Ngemplak	0,6294
3	Munggung	0,1114	Pasar Legi	2,1956	Munggung	0,4045
4	Komplang	0,1041	Nayu Ngemplak	2,1334	Komplang	0,4016
5	Pasar Legi	0,0834	Setabelan	2,0931	Rejosari	0,3417
6	Rejosari	0,0735	Komplang	1,7860	Pasar Legi	0,3173
7	Nayu Ngemplak	0,0728	Rejosari	1,6519	Setabelan	0,2574
8	Setabelan	0,0638	Ngemplak	1,5549	Nayu Ngemplak	0,2551
9	Ngebrusan	0,0553	Ringin Semar	1,3229	Ngebrusan	0,2146
10	Balapan	0,0488	Ngebrusan	1,2636	Balapan	0,1974
11	Ringin Semar	0,0485	Balapan	0,9089	Ringin Semar	0,1945

## References

- [1] Chang, D.Y., 1996, Applications of The Extent Analysis Method on Fuzzy AHP. *European Journal of Operational Research*, 95(3), 649-655.
- [2] Fajriyah, Ainun 2016 Implementasi Metode TOPSIS pada Sistem Pendukung Keputusan Seleksi Calon Tenaga Kerja di PT. Asry Amanah Timur Technical Information FMIPA Universitas Sebelas Maret Surakarta
- [3] Fitriyanto A 2016 Sistem Penentuan Prioritas Pemeliharaan Bangunan Gedung Negara di Kabupaten Sragen (Studi Kasus Bangunan Gedung Sragen Technopark) Thesis Civil Engineering Universitas Sebelas Maret Surakarta
- [4] Henderi, Norhikmah, Rumini 2013 Metode Fuzzy AHP dan AHP dalam Penerapan Sistem Pendukung Keputusan STMIK AMIKOM Yogyakarta 9
- [5] Huang Y. H 2012. *A Model for Concurrent Maintenance Of Bridge Elements*. *Automation in Construction* 21 pages 74-80. Univ. of Science and Technology. Taiwan
- [6] Hwang, C.L., & Yoon, K. (1981), *Multiple attributes decision-making methods and applications*. Springer, Berlin.
- [7] Junaidi et al 2006. Proceeding seminar on national management technology .Priority handling of road improvement project on segments roads in kabupaten kapuas by the method of ahp .Technology institute of ten november
- [8] Kabir, G., Hasin, M.A.A. (2012). Comparative Analysis of TOPSIS and Fuzzy TOPSIS for the Evaluation of Travel Website Service Quality. *International Journal for Quality Research*, 6(3), 169-185
- [9] Kementerian Pekerjaan Umum 2015 Informasi Statistik Infrastruktur Pekerjaan Umum dan Perumahan Rakyat *PUSDATIN* [2] Nurdin A, Kristiawan SA, Handayani D 2017 *JP: Conf. Series*. **795** 012070

- [10] Kilang C 2016 Evaluasi Kerusakan dan Prioritas Pemeliharaan (Studi Kasus di Kabupaten Sragen) Thesis Civil Engineering Universitas Sebelas Maret Surakarta
- [11] Saaty TL 1988 What Is the Analytic Hierarchy Process. Berlin: Conference Paper, Mathematical Models for Decision Support. **Vol 01, No 48**
- [12] Saaty TL 2008 Decision Making with the Analytical Hierarchy Process. Pittsburgh: International Journal Science Services. **Vol 1, No 1:83-97**
- [13] Stratt RW 2010 Bridge Management a System Approach for Decision Making. Brussel: School of Doctoral Studies (European Union) Journal. **Vol 11, No 4:67-108.**