

Mekanika: Majalah Ilmiah Mekanika

Effect of Turbine Blades Transformation on Savonius Turbine

Performance

Muhammad Iyas Abdul Alim¹, Syamsul Hadi¹, Dominicus Danardono Dwi Prija Tjahjana^{1*}

¹ Mechanical Engineering, Engineering Faculty, Universitas Sebelas Maret, Surakarta, Indonesia

*ddanardono@staff.uns.ac.id

Keywords:

Savonius turbine, blade transformation, negative torque

The purpose of this study was to determine the effect of the transformation of Savonius turbine blades based on the C_p -TSR curve. The transformation referred to here is the change in the blade angle, so that the area of the cross section of the returning blade is changed. Therefore, the negative torque of the turbine obtained from the air flow is reduced. The specimen has three variations, without transformation or conventional turbine, transformation of 5° , and transformation of 10° . With the reduction in the cross-sectional area of the returning turbine blade, it is expected that the turbine performance will increase. Experiments were carried out using wind tunnels with load variations at air speed of 5, 6, and 7 m/s. The experimental result shows that the blade transformation movement causes a shift in the center of mass which increases the turbine vibration that directly affects turbine performance. The negative effect from the vibration is greater than the positive effect caused by reducing negative torque. The experimental results obtained show that conventional turbines have better performance than turbines with 5° and 10° blade transformations.

1 Introduction

With Indonesia's population being the 5th most populous country globally and still growing, Indonesia requires a very large amount of energy [1, 2, 3, 4]. Until now, the input from power plants is still dominated by fossil energy (95.57%), the remaining (4.43%) is renewable energy [5]. Considering the supply of fossil energy is limited and the effect of pollution on the environment [6], before all fossil energy runs out, further development is needed related to renewable energy.

Wind energy is a renewable energy that is freely available in nature, does not pollute the environment, and can be used easily and predicted to overtake fossil energy in the future [7, 8, 9, 10]. One of the many ways to utilize wind energy is using the wind to rotate generators with the help of turbines. Small-scale power plants have grown more rapidly because they can function as independent power plants in hard-to-reach areas [11, 12, 13, 14].

One type of turbine that is widely used is the Savonius turbine. Its relatively simple shape and relatively low performance have made this type of turbine researched by many people. Although very popular, the

<https://dx.doi.org/10.20961/mekanika.v21i1.48619>

Received 17 February 2022; received in revised version 20 March 2022; Accepted 21 March 2022
Available Online 31 March 2022

2579-3144

© 2022 Mekanika: Majalah Ilmiah Mekanika. All right reserved

Alim et al.

Savonius wind turbine has a pretty low performance compared to the other wind turbine types. Savonius turbine rotates due to differences in drag forces that occur in the turbine blades, namely positive drag force, which occurs on the advancing, and negative drag force, which appears on the returning blade. These drag forces create positive torque and negative torque, respectively. To increase the performance of the Savonius wind turbine, the net operating torque should be increased. In this study, the projected area of the returning blade is designed to be automatically reduced by adding hinges on the part of the blade.

The wind turbine performance is visualized with the C_p -TSR graph, where the coefficient of performance, C_p , is the ratio of the energy captured by the turbine over the energy present in the fluid flow. The tip speed ratio, TSR, is the ratio of the tangential velocity of the tip of the blade over the velocity of the fluid flow. The equation of C_p and TSR can be written as follows:

$$C_p = \frac{P_t}{P_a} = \frac{P_t}{\frac{1}{2} \rho A V^3} = \frac{T \omega}{\frac{1}{2} \rho A V^3}$$

$$\text{TSR} = \lambda = \frac{V_{rotor}}{V} = \frac{\omega \cdot r}{V}$$

Where:

P_t = Energy captured by turbine (W)

P_a = Energi present in the fluid flow (W)

T = Torque (Nm)

ω = Rotational speed (rad/s)

r = Turbine radius (m)

2 Methodology

This study used an experimental approach using a low-speed wind tunnel. The turbine specimens are made from a combination of PLA 3d printed and aluminum plate material (Figure 1). The turbine blades have transformation variations of 0, 5, and 10 degrees. This turbine was designed based on the previous research, which has 120° blade angle (Figure 2) [5], three bladed [15], and endplates [16]. The turbine torque and rotational speed are measured by using prony-brake system and tachometer, respectively.

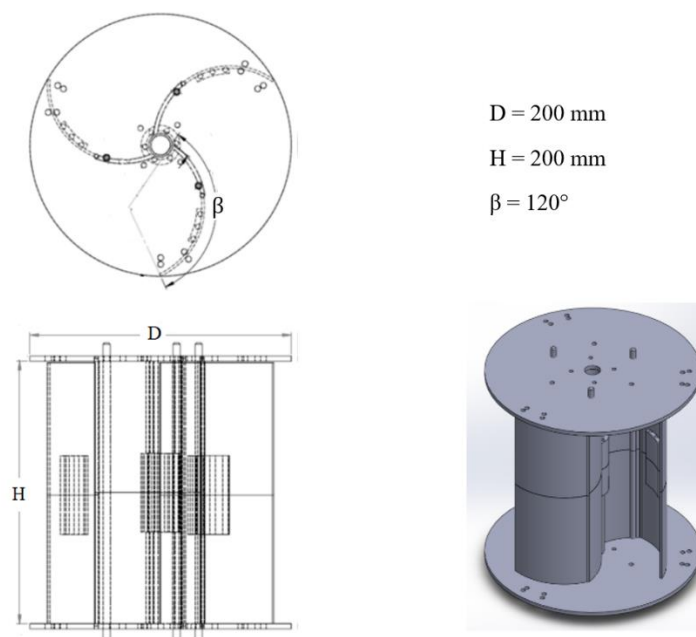


Figure 1 Specimen used in the experiment.

Alim et al.

This experiment uses wind speed variations of 5, 6, and 7 m/s with load variations of 25, 50, and 75 grams for wind speeds of 5 m/s; 25, 50, and 100 grams for wind speeds of 6 m/s; 50, 100, and 150 grams for a wind speed of 7 m/s. The turbine is measured after rotating for at least 30 seconds. The torque and rotational speed are measured five times with intervals of 10 seconds and then averaged. Hinges are put on the blades to make the transformation of the blades when in the returning position (Figure 2).

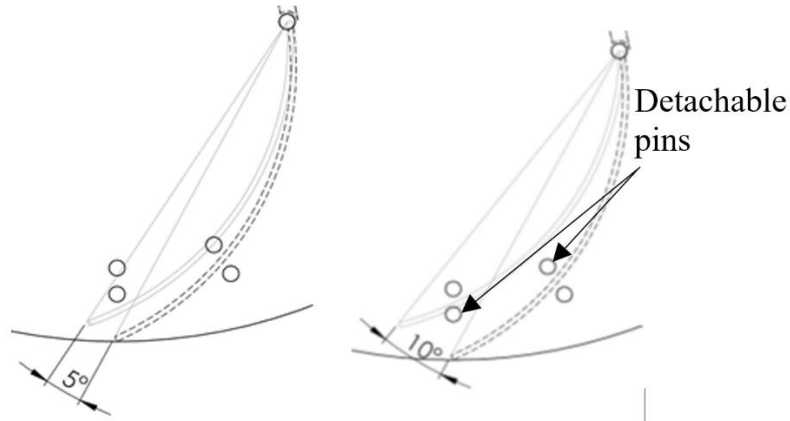


Figure 2 Visualization of blade transformation

3. Result and Discussion

The turbine's performance obtained in this study is presented in the graph as shown in Figure 3. From the Figure 3, it can be seen that the C_p of 0° variation has maximum C_p of around 0.039, higher than the 5° and 10° variations, which have a maximum C_p of around 0.036. The C_p of 5° variation is over the 10° variation at $TSR < 1$, and vice versa at $TSR > 1$.

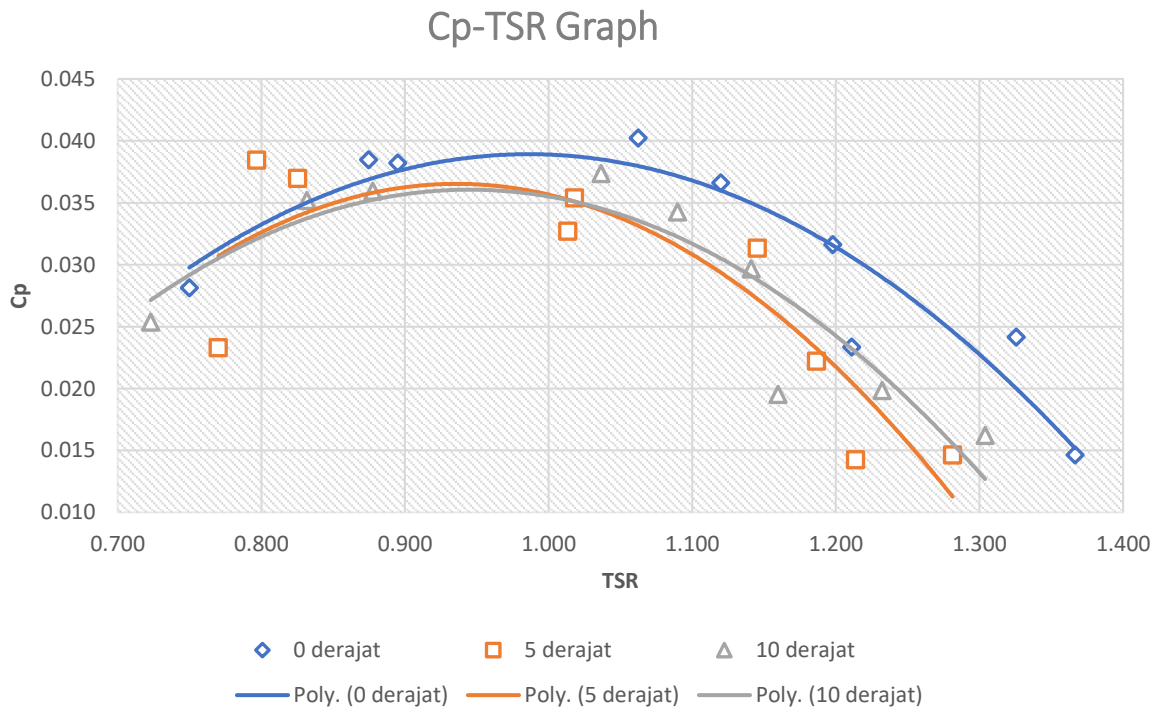


Figure 3 Cp-TSR Graph

Alim et al.

It is found out that the blade transformation causes the center of mass of the turbine to shift periodically and makes vibrations which result in instability, causes friction, and reduces turbine performance. The placement of the pins (stoppers) also affects turbine performance. The momentum contained in the moving and stopping blades due to hitting the stoppers occurs on the turbine and creates negative torque, which reduces turbine performance. This condition is visualized in Figure 4 and 5. From Figure 4 and 5, it can be seen that the force flow from the momentum has a distance from the center of rotation which creates negative torque and reduces turbine performance.

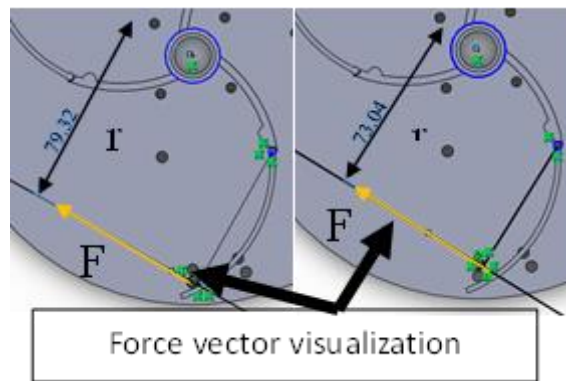


Figure 4 Force's vector visualization

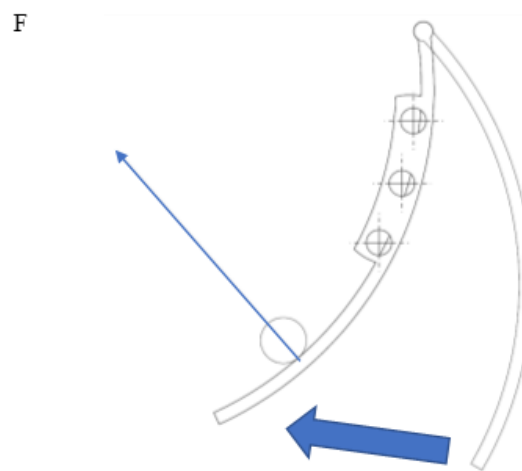


Figure 5 Impact Force generation

4. Conclusion

Based on data and results analysis regarding the effect of turbine blade transformation on the Savonius turbine, several conclusions are obtained as follows:

1. The transformation of the blade on the Savonius blade affects the performance of the turbine.
2. The conventional Savonius turbine performs better than the 5° and 10° blade transformation turbines.
3. The blade transformation cannot improve the turbine's performance due to vibrations from the shifting of the turbine's center of mass due to blade transformation and temporary negative torque from the blade's momentum hitting the stopper.
- 4.

References

1. Yesilbudak, M. (2018). Implementation of novel hybrid approaches for power curve modeling of wind turbines. *Energy Conversion and Management* 171 (2018) 156–169.

Alim et al.

2. Xu, Z., Feng, Y. H., Zhao, C. Y., Huo, Y. L., Li, S., Hu, X. J., Zhong, Y. J. (2018). Experimental and numerical investigation on aerodynamic performance of a novel disc-shaped wind rotor for the small-scale wind turbine. *Energy Conversion and Management* 175 (2018) 173–191.
3. Chong, W. T., Muzammil, W. K., Wong, K. H., Wang, C. T., Gwani, M., Chu, Y. J., Poh, S. C. (2017). Cross axis wind turbine: Pushing the limit of wind turbine technology with complementary design. *Applied Energy* 207 (2017) 78–95.
4. Patil, R., Daroczy, L., Janiga, G., Thevenin, D. (2018). Large eddy simulation of an H-Darrieus rotor. *Energy* 160 (2018) 388–398.
5. Sanditya, T. A., Prasetyo, A., Kristiawan, B., & Hadi, S. (2018). Effect of Blade Curvature Angle of Savonius Horizontal Axis Water Turbine to the Power Generation. *IOP Conf. Series: Journal of Physics: Conf. Series* 979 (2018) 012044.
6. Aghbalou, N., Charki, A., Elazzouzi, S.R., Rekloui, K. (2017). A probabilistic assessment approach for wind turbine-site matching. *Electrical Power and Energy Systems* 103 (2018) 497–510.
7. Zergane, S., Smaili, A., Masson, C. (2018). Optimization of wind turbine placement in a wind farm using a new pseudo-random number generation method. *Renewable Energy* 125 (2018) 166–171.
8. Damak, A., Driss, Z., Abid, M. S. (2017). Optimization of the helical Savonius rotor through wind tunnel experiments. *Journal of Wind Engineering & Industrial Aerodynamics* 174 (2018) 80–93.
9. Ma, N., Lei, H., Han, Z., Zhou, D., Bao, Y., Zhang, K., Zhou, L., Chen, C. (2018). Airfoil optimization to improve power performance of a high-solidity vertical axis wind turbine at a moderate tip speed ratio. *Energy* 150 (2018) 236–252.
10. Brouwer, S. R., Al-Jibouri, S. H. S., Cardenas, I. C., Halman, J. I. M. (2018). Towards analysing risks to public safety from wind turbines. *Reliability Engineering and System Safety* 180 (2018) 77–87.
11. Zhang, S., Luo, K., Yuan, R., Wang, Q., Wang, J., Zhang, L., Fan, J. (2018). Influences of operating parameters on the aerodynamics and aeroacoustics of a horizontal-axis wind turbine. *Energy* 160 (2018) 597–611.
12. Pereria, T.R., Batista, N. C., Fonseca, A. R. A., Cardeira, C., Oliveira, P., Melicio, R. (2018). Darrieus wind turbine prototype: Dynamic modeling parameter identification and control analysis. *Energy* 159 (2018) 961–976.
13. Jeong, H., Lee, S., Kwon, S. D. (2018). Blockage corrections for wind tunnel tests conducted on a Darrieus wind turbine. *Journal of Wind Engineering & Industrial Aerodynamics* 179 (2018) 229–239.
14. Lee, K. Y., Tsao, S. H., Tzeng, C. W., Lin, H. J. (2017). Influence of the vertical wind and wind direction on the power output of a small vertical-axis wind turbine installed on the rooftop of a building. *Applied Energy* 209 (2018) 383–391.
15. Wenehenubun, F., Saputra, A., & Sutanto, H. (2015). An experimental study on the performance of Savonius wind turbines related with the number of blades. *Energy Procedia*, 68, 297–304.
16. Jeon, K. S., Jeong, J. I., Pan, J. K., Ryu, K. W. (2014). Effects of end plates with various shapes and sizes on helical Savonius wind turbines. *Renewable Energy* 79 (2015) 167–176.