

Mekanika: Majalah Ilmiah Mekanika

Pressure Drop and Void Fraction of Two-Phase Flow (Air-Water) in Grooved Vertical Pipes.

Supa Kusuma Aji^{1*}, Nicky Suwandhy A. S.¹, Chandra Gunawan¹, Bayu Pranoto¹, Hangga Wicaksono¹

¹ Politeknik Negeri Malang, Malang, Indonesia

*Corresponding Author's email address: supa.kusuma@polinema.ac.id

Keywords:

Pressure drop
Void fraction
Two-phase flow
Vertical groove pipe

Abstract

Two-phase flows consisting of liquids and gases are often found in everyday life and are used on an industrial scale. In an industrial environment, this flow has many weaknesses, including pressure drop and void fraction. One strategy to reduce losses that arise is to use passive methods. The passive method used is to utilize the shape of the grooves in the channel. In this study, the flow is used to determine its effect on the pressure drop and void fraction that appears in two-phase flow. The experimental method was used for this study. The test pipe is equipped with 16 grooves, while the smooth pipe (without grooves) is used as a comparison. The test pipe is made of acrylic material. The water fluid is circulated using a centrifugal water pump with a superficial speed of 0.33-0.42 m/s. Air fluid is supplied using a compressor with superficial speeds of 0.049, 0.066, and 0.082 m/s. Measurement of pressure drop was carried out using a pressure transmitter with an Arduino data logger. The void fraction is calculated by determining the ratio of the volume fraction of water and air in the test tube. The results of the study revealed that the use of 16 grooves in the pipe can reduce the pressure drop and cavity fraction that appears when compared to smooth pipes.

1 Introduction

Several studies have been conducted to investigate two-phase flow, including flow patterns, mechanisms, and fluid flow instability. Flow in vertical channels can be broadly classified into several flow patterns, such as bubbly flow, slug flow, churn flow, and annular flow [1-3]. Many efforts have been made to find efficient ways to reduce energy losses in channels. One method that can be employed is by modifying the channel's geometry, which is a concept associated with controlling vortex formation. Natural geometry forms are frequently used as inspiration for designing better channels. One example is adding grooves to the channel's geometry. Research on shark skin surface itself has been conducted and shown that the shape of shark skin surface is capable of reducing friction when moving through water. With the design of such skin surfaces, sharks can move through the water using minimal energy. The impact of grooves on laminar and turbulent flow in reducing drag has been successfully identified through numerical analysis and visualization [4][5]. In the context of turbulent fluid flow, the addition of grooves affects the boundary layer conditions and the viscous region near the pipe walls. This behavior significantly influences the reduction of pressure and viscous resistance that occurs during fluid flow. A comparative study between pipes without grooves and pipes with grooves has also been conducted. Under turbulent conditions, flow

<https://dx.doi.org/10.20961/mekanika.v22i2.76968>

Revised 22 August 2023; received in revised version 1 September 2023; Accepted 16 September 2023
Available Online 30 September 2023

2579-3144

© 2023 Mekanika: Majalah Ilmiah Mekanika. All right reserved

Aji, et al.

along the grooves successfully reduces friction and Reynolds number, indicating a reduction in fluid flow resistance [6-8].

Two-phase flow in corrugated pipe with a vertical position has been identified and compared with smooth pipe [9]. The droplet size of bubbles in grooved pipes indicates larger liquid fragments compared to smooth pipes. The friction factor is influenced differently by varying numbers of grooves with parallel flow patterns along the pipe. In a study of single-phase horizontal flow, it was discovered that pipes with 2, 8, and 32 grooves experienced reduced friction due to the larger size of vorticity formed compared to the groove width. As a result, the flow patterns became more straight with a smaller velocity gradient. In pipes with 4 or 16 grooves, vortices formed with sizes smaller than the groove width. This formation caused an increase in the friction factor, resulting in a more circular vortex movement with a higher velocity gradient. Choosing the correct number of grooves can minimize energy loss due to friction. Flow-through grooves can achieve better drag reduction compared to smooth pipes because they reduce shear stress and impede vortex flow translation [4][6-9]. After conducting research, it has been determined that grooves can be utilized for commercial purposes to decrease drag. Previous studies have explored flow patterns and structures passing through grooves on flat plates, external flows, and grooved pipes using numerical and experimental methods [10-12]. When pipes are in a vertical position, the pressure drop effect is more significant compared to pipes in a horizontal position. The gravity factor mainly causes this. Additionally, the air pressure in the pipe, which is inversely proportional to the nature of the water, can move up against gravity, resulting in a higher void fraction. As a result, water falls because it is attracted by gravity [3][13][14].

Studying the flow of two-phase fluids through fluted pipes is fascinating because the grooves in the channel can reduce losses in industrial-scale applications [9][10][15]. Additionally, the presence of grooves affects the resulting flow pattern. In this study, we observed pipes with varying numbers of grooves compared to smooth pipes (without grooves) using two-phase fluids like air and water. We modified the pipe's geometry by adding grooves along the pipe, which has yet to be researched with parallel grooves in pipes with a vertical position. However, pipe installation is carried out in various positions, both for daily and industrial use. This research aims to determine the effect of the number of grooves on the pressure drop and the fraction of void space that passes through the pipe in a vertical position.

2 Experimental Methods

This research used an experimental method to study pressure drops and void fraction characteristics. In this study, the test section was vertically directed with air and water as the fluids. The test section was an acrylic pipe with grooves inside and a diameter of 2.54 cm. The acrylic pipe was 100 cm long and had 16 grooves. In order to compare the outcomes, a smooth acrylic pipe was utilized. The research involved measuring the pressure drop and void fraction.


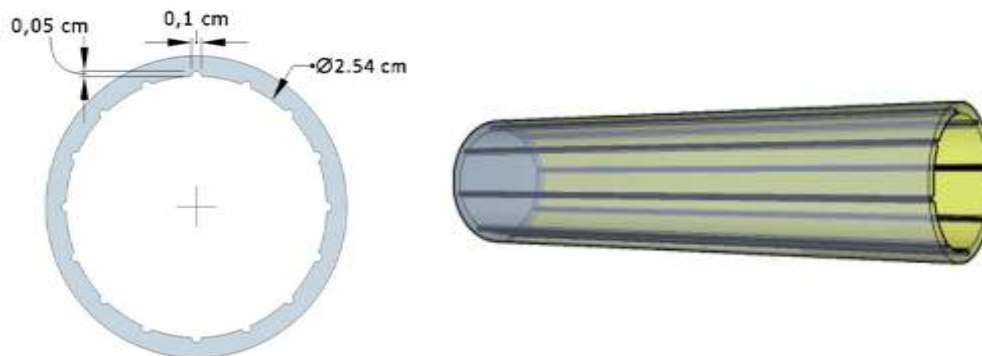


Figure 1. Pipe cross-section

Aji, et al.

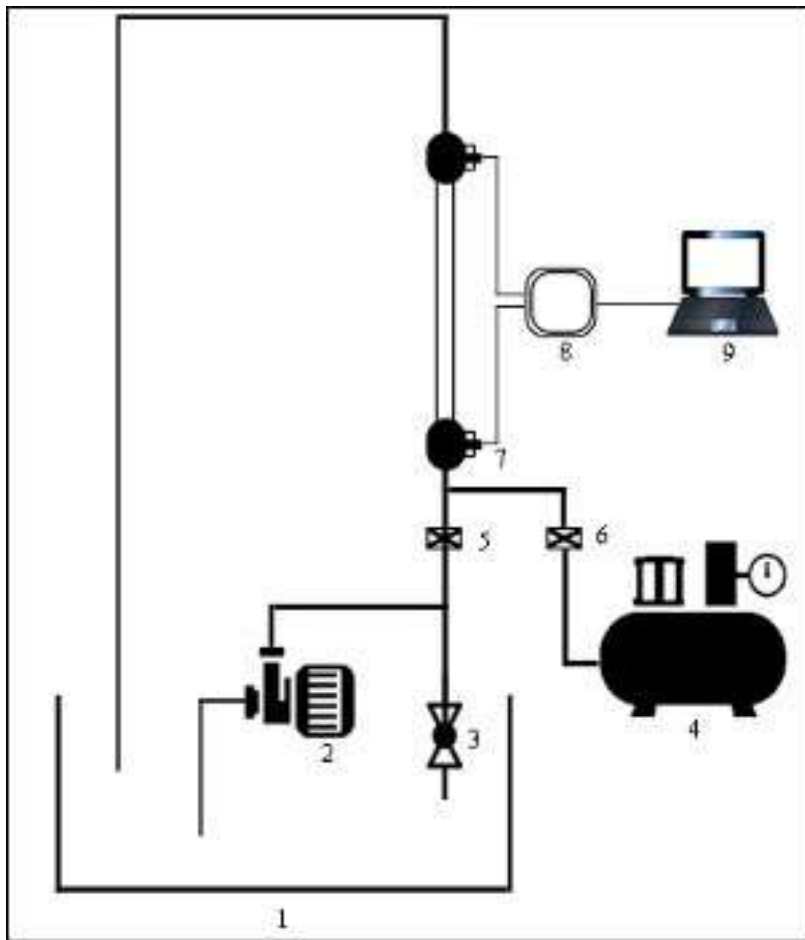

Experimental Set up :

1. Water Tank
2. Water Pump
3. Valve
4. Compressor
5. Digital Flowmeter
6. Rotameter
7. Pressure Sensor
8. Arduino Data Logger
9. Laptop

Figure 2. Research setup schematic

The research setup, as shown in Figure 2, was used for the testing. After the availability of grooved pipes, they were installed vertically in the research setup. Pressure sensors were fixed at both ends of the grooved pipes and were directly connected to an Arduino data logger. Pressure measurement was carried out using a type Pressure Transmitter type 0-500 psi DC 5V Arduino pressure transmitter that has been calibrated with FESTO SDE1.

Each pipe was subjected to alternating variations in air and water superficial velocities throughout the testing process. The air's superficial velocity ranged from 0.049 to 0.082 m/s, while that of water was between 0.066 and 0.23 m/s. The theoretical calculations listed below are needed to facilitate the research process [3][15-18]. The calculation of the superficial velocities of air and water can be determined using equations 1 and 2:

$$j_G = \frac{Q_G}{A} \quad (1)$$

$$j_L = \frac{Q_L}{A} \quad (2)$$

j_G = superficial velocity of gas (m/s)

Q_G = gas flow rate (lpm)

j_L = superficial velocity of liquid (m/s)

Q_L = liquid flow rate (lpm)

A = surface area (m²)

Aji, et al.

For the mixed Reynolds number calculation, the following equation can be used:

$$Re_m = \frac{\rho_m V_m D}{\mu_h} \quad (3)$$

ρ_m = mixture density (kg/m³)

V_m = actual velocity of the mixture (m/s)

D = pipe diameter (m)

μ_h = homogeneous viscosity (Pa/s)

α is the gas fraction in the channel, while $(1 - \alpha)$ is the liquid fraction in the channel.

$$\alpha_G = 1 - \alpha_L \quad (4)$$

From the gas quality and liquid quality equations, the value of mixture density can be determined using the following equation:

$$\rho_h = \alpha_G \rho_G + \alpha_L \rho_L \quad (5)$$

The value of mixture viscosity can be determined using the following equation:

$$\frac{1}{\mu_h} = \frac{x}{\mu_G} + \frac{1-x}{\mu_L} \quad (6)$$

The value of the actual velocity for each phase can be determined using the following equations:

$$V_G = \frac{j_G}{\alpha_G} \quad (7)$$

$$V_L = \frac{j_L}{\alpha_L} \quad (8)$$

Table 1. Fluid Properties at Average Temperature of 30°C

| Fluids | Density | Viscosity |
|--------|--------------------------|----------------------------|
| Water | 997 (kg/m ³) | 10 ⁻³ Pa/s |
| Air | 1.2 (kg/m ³) | 1.81x10 ⁻⁵ Pa/s |

Once all variations have been adjusted, the fluid flow is allowed to circulate until a stable two-phase flow condition is achieved. Once stabilized, the pressure drop is measured for a predetermined duration. The pressure sensor is set to display data every minute, and the Arduino data logger is always connected to the laptop when collecting pressure data. It ensures that every reading of the pressure sensor is directly stored in the laptop. The collected pressure data is processed and presented in graphical form based on the measurement results [1][3][10][15][19].

In determining the void fraction, the quick and simultaneous closing valve method is utilized. The test pipe's inlet and outlet sides are connected to a solenoid valve that can be controlled simultaneously, ensuring both valves open and close at the same time. Once pressure data collection is complete, the valve is closed, trapping air and water in the pipe. The trapped air and water gather according to their respective fractions, and equation (4) is used to calculate the ratio of water volume to air volume in the pipe. For easier water volume calculation, a measuring cup on the mL scale is used. The above equation provides the volume of air, which is the void fraction [12][16][17][20].

Aji, et al.

3 Result and Discussion

3.1 Pressure Drop

In the process of research results and data analysis, the pressure drop for each test pipe is graphically analyzed.

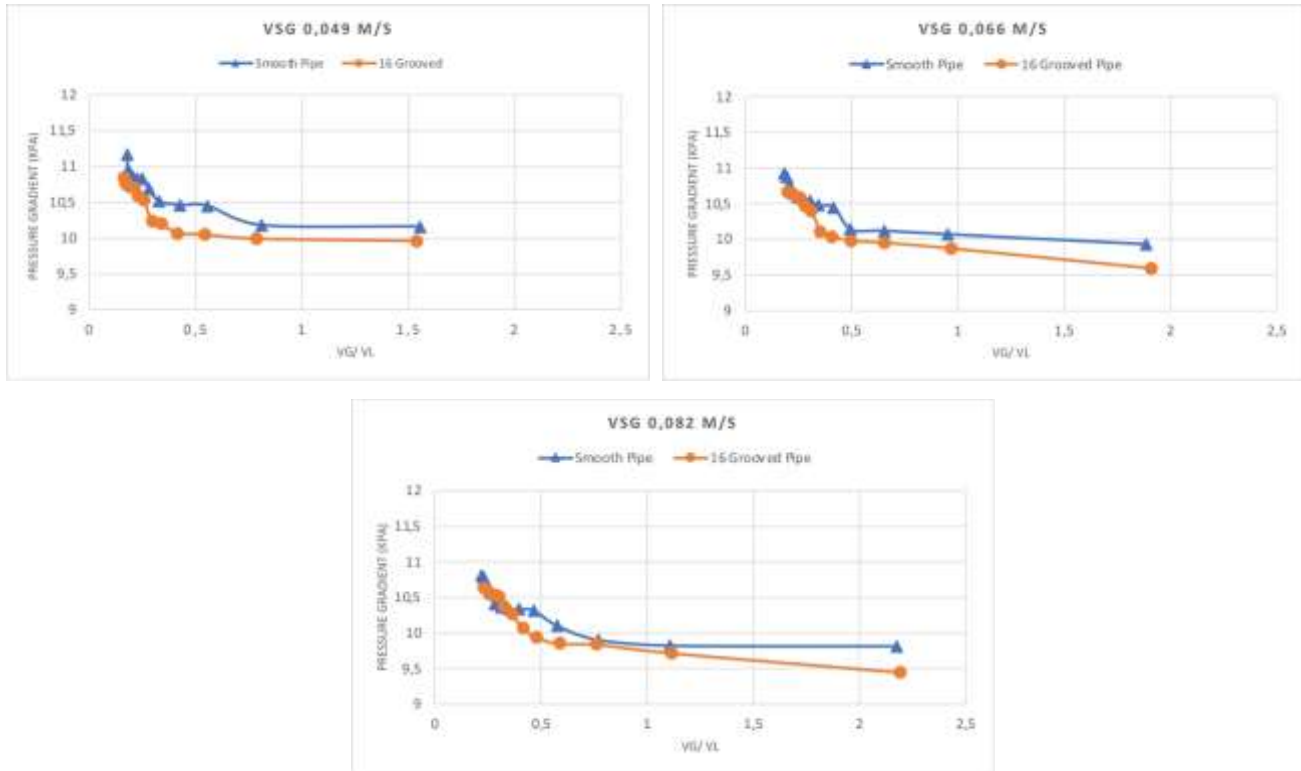


Figure 3. Pressure drop values against VG/VL at different superficial gas velocities.

Figure 3 clearly shows that as pressure drop values increase, both test pipes tend to have lower VG/VL ratios. Conversely, when pressure drop values decrease, VG/VL ratios tend to rise. The pipe with 16 grooves has significantly lower pressure drop values than the smooth pipe, proving that the grooves effectively reduce pressure drop [10][19].

3.2 Void Fraction

By analyzing the void fraction data, we can accurately determine the quantities of water and air within the pipe. It is important to note that void fraction directly influences the density of the two-phase mixture, which ultimately impacts the pressure drop of one component, specifically the hydrostatic pressure caused by gravitational force [15][17]. An analysis is conducted using graphical methods to examine the influence of void fraction on the grooved pipe by comparing the void fraction to the gas volume to liquid volume ratio (VG/VL).

Aji, et al.

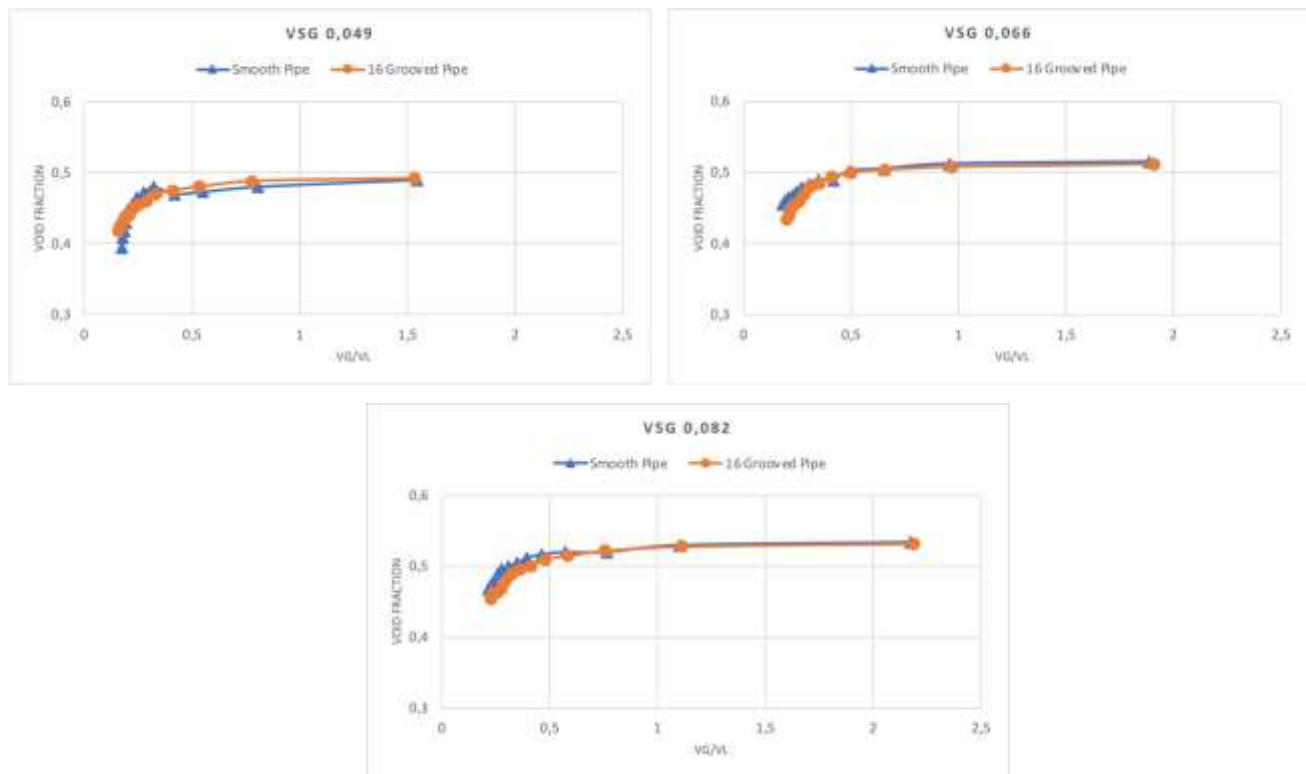


Figure 4. the void fraction values against VG/VL at different superficial gas velocities.

In all tested pipes, the change in void fraction with respect to VG/VL shows similar patterns. The void fraction is proportional to VG/VL, and when the void fraction is low, so is VG/VL. As the superficial gas velocity increases, there is a slight difference in the void fraction values when VG/VL is low. The changes in void fraction also affect the mixture density, which in turn affects the hydrostatic pressure as a part of the total pressure drop. However, in this study, the changes in the void fraction are minor and do not have a significant impact on the overall total pressure drop value.

4 Conclusion

From the results of the research using the experimental method and the data processing that has been done, the different pressure drop results are obtained between the two-phase flows that pass through smooth pipes and grooved pipes. In grooved pipes, the value of the pressure drop tends to be smaller than that of plain pipes. The addition of the superficial velocity of the gas also results in a smaller pressure drop in the grooved pipe. It is also influenced by the gravity factor, where air has the natural property of moving away from gravity so that it can push the movement of the fluid as a whole. Meanwhile, the data obtained for measuring the void fraction in grooved pipes shows a decrease. The results of measuring the void fraction at each increase in the superficial velocity of the gas also result in a change in the void fraction. However, the decrease is minimal, and the change is not very significant. Overall, the grooves used as a passive method to reduce pressure drop have been successful. The addition of grooves in the pipe turns out to affect changes in the value of the void fraction, which is relatively small when compared to plain pipes. For the development of knowledge in the future, the use of paths with more numbers can be used as a reference. So that the most efficient number of grooves can be obtained to reduce pressure drop and especially the void fraction because, in this study, changes in the value of the void fraction occur on a relatively small scale.

Aji, et al.

References

1. H. Kusumaningsih and et al., "Analisis Pressure Drop Dan Pola Aliran Dua Fase (Air-Udara) Pada Pipa Horizontal Melalui Orifice," *Flywheel J. Tek. Mesin Untirta*, vol. 2, no. 1, pp. 14-21, 2018.
2. A. Awaluddin, S. Wahyudi, and A. S. Widodo, "Analisis Aliran Fluida Dua Fase (Udara-Air) melalui Belokan 45o," *J. Rekayasa Mesin*, vol. 5, no. 3, pp. 217-224, 2014.
3. C. E. Brennen, *Fundamentals of multiphase flow*. Cambridge University Press, 2005.
4. Y. Z. Law and R. K. Jaiman, "Passive control of vortex-induced vibration by spanwise grooves," *J. Fluids Struct.*, vol. 83, pp. 1-26, 2018.
5. S. Martin and B. Bhushan, "Fluid flow analysis of continuous and segmented riblet structures," *Rsc Adv.*, vol. 6, no. 13, pp. 10962-10978, 2016.
6. N. O. Tanase, I. R. Damian, D. Broboana, and C. Balan, "The influence of grooved surface and liquid properties on vortices formation in vicinity of immersed cylinders," *Energy Procedia*, vol. 85, pp. 521-529, 2016.
7. Y. Wang, *Effects of Grooves on Drag in Laminar Channel Flow*. Canada: Doctoral dissertation, The University of Western Ontario, 2018.
8. P. W. Sunu, I. N. G. Wardana, A. A. Sonief, and N. Hamidi, "Flow behavior and friction factor in internally grooved pipe wall," *Adv. Stud. Theor. Phys.*, vol. 8, no. 14, pp. 643-647, 2014.
9. T. H. Kim, V. S. Chalgeri, W. Yoon, B. J. Yun, and J. H. Jeong, "Visual observations of flow patterns in downward air-water two-phase flows in a vertical narrow rectangular channel," *Ann. Nucl. Energy*, vol. 114, pp. 384-394, 2018.
10. Y. Wang, *A study of two-phase flow regime and pressure drop in vertical pipe*. The University of North Dakota, 2018.
11. L. C. Ruspini, C. P. Marcel, and A. Clause, "Two-phase flow instabilities: A review," *Int. J. Heat Mass Transf.*, vol. 71, pp. 521-548, 2014.
12. S. Sukamta, A. R. Ilham, and S. Sudarja, "The Investigation of Void Fraction of Two-Phase Flow Air-Water And Glycerine (0-30%) in The Capillary Pipe with Slope of 50 to Horizontal Position," *Media Mesin Maj. Tek. Mesin*, vol. 20, no. 1, pp. 8-17, 2019.
13. Y. Xue, H. Li, C. Hao, and C. Yao, "Investigation on the void fraction of gas-liquid two-phase flows in vertically-downward pipes," *Int. Commun. Heat Mass Transf.*, vol. 77, pp. 1-8, 2016.
14. C. C. Tang, S. Tiwari, and A. J. Ghajar, "Effect of void fraction on pressure drop in upward vertical two-phase gas-liquid pipe flow," *J. Eng. gas turbines power*, vol. 135, no. 2, p. 022901, 2013.
15. J. Thome, "Two-phase pressure drops," in *Engineering Data Book III*, Wolverine Tube. Inc., 2007.
16. M. Pietrzak and M. Płaczek, "Void fraction predictive methods in two-phase flow across a small diameter channel," *Int. J. Multiph. Flow*, vol. 121, p. 103115, 2019.
17. J. R. Thome, "Void Fractions in Two-Phase Flows," in *Engineering Data Book III*, Wolverine Tube, 2006.
18. M. Kawaji, "Fundamental Equations for Two-Phase Flow Tubes.," in *Handbook of Thermal Science and Engineering*, Springer International Publishing, 2018, pp. 1849-1906.
19. S. K. Aji, D. Widhiyanuriyawan, and L. Yuliati, "Pressure Drop dan Pola Aliran Dua Fase (Air-Udara) Melewati Pipa Groove Vertikal," *J. Rekayasa Mesin*, vol. 11, no. 3, pp. 357-365, 2020.
20. J. Jia, A. Babatunde, and M. Wang, "Void fraction measurement of gas-liquid two-phase flow from differential pressure," *Flow Meas. Instrum.*, vol. 41, pp. 75-80, 2015.